


Basic Series

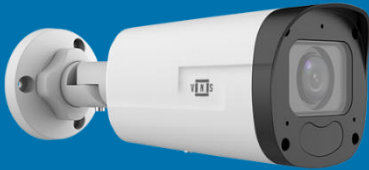

KEY FEATURES

- 2 Megapixel Resolution
- 1920 x 1080, 30fps
- 265+ Vcom/H.265/H.264/MJPEG
- Multi Stream
- 2.8 ~ 12mm VF Motorized Zoom Lens
- 120db WDR
- Micro SD Card Slot
- Corridor Mode
- Built-in Microphone
- IR Range: up to 50M (164ft)
- DC12V & PoE
- Weatherproof IP67 & IK10

Model No.	NV-ZB12R5AC12	
Sensor	2.0 Megapixel, Progressive Scan, CMOS	
Lens	2.8 ~ 12mm VF Motorized Zoom Lens	
Shutter	Auto/Manual, 1 ~ 1/100000s	
Minimum Illumination	Colour: 0.005 Lux (F1.6, AGC ON) 0 Lux with IR on	
Day/Night	IR-cut Filter with Auto Switch (ICR)	
Digital Noise Reduction	2D/3D DNR	
S/N	≥52 dB	
IR Range	Up to 50m (164ft) IR Range	
Defog	Digital Defog	
WDR	120db WDR	
Video		
Video Compression	265+ Vcom, H.264, MJPEG	
H.264 Code Profile	Baseline Profile, Main Profile, High Profile	
Frame Rate	Main Stream: 1080P (1920 x 1080), Max 30fps; 720P (1280 x 720), Max 30fps Sub Stream: 720P (1280 x 720), Max 30fps; D1 (720 x 576), Max 30fps; 640 x 360, Max 30fps; 2CIF(704 x 288), Max 30fps; CIF(352 x 288), Max 30fps;	
Corridor Mode	Supported	
XLight	Supported	
BLD	Supported	
BLC	Supported	
OSD	Up to 4 OSDs	
Privacy Mask	Up to 4 areas	
ROI	Up to 8 areas	
Motion Detection	Up to 4 areas	
Network		
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, SSL, QoS	
System Compatibility	Onvif (Profile S, G, T), API	
Interface		
Network	10M/100M Base-TX Ethernet	
Built-in Microphone	Supported	
Storage		
Edge Storage	MicroSD, up to 128GB	
Network Storage	ANR	
General		
Power	DC 12V±25%, PoE (IEEE 802.3af)	Power Consumption: Max 8.5W
Dimensions(L x W x H)	206 x 74 x 74mm (8.1" x 2.9" x 2.9")	
Weight	0.54kg (1.19lb)	
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (Non-condensing)	
Ingress Protection	IP67	
Surge Protection	6KV	
Product Details		
Part Code	NV-ZB12R5AC12	
Description	2MP Bullet, 1920 x 1080:30fps, 265+ Vcom/H.264, Multi Stream, 2.8~12mm Motorized Lens, SD Card Slot, 50m VIR, 12V & PoE, BLD, 120db WDR, IP67, Mic	

DIMENSIONS

