


# 4MP FIXED LENS VIR MINI BULLET

2688 X 1520:25FPS, 2.8/4MM LENS, 265+ VCOM/H.264, 120DB WDR, MULTI STREAM

Basic Series

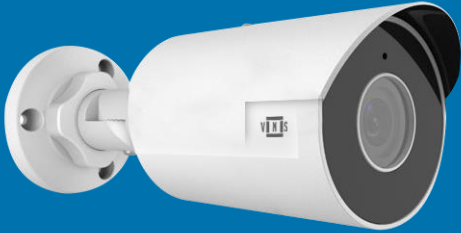

## KEY FEATURES

- 4 Megapixel Resolution
- 2688 x 1520:25fps
- 265+ Vcom/H.265/H.264/MJPEG
- Multi Streams
- Fixed Lens 2.8/4mm
- 120db WDR
- Corridor Mode 9:16
- Built-in Microphone
- Micro SD up to 256 GB
- 50m (164ft) VIR Distance
- DC12V & PoE
- Weatherproof IP67

Model No.	NV-FB14R5AC28	NV-FB14R5AC04
Sensor	4.0 Megapixel, Progressive Scan, CMOS	
Lens	2.8 @ F1.6 Fix Lens	4mm @ F1.6 Fix Lens
Shutter	Auto/Manual, 1 ~ 1/100000s	
Minimum Illumination	Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR on	
Day/Night	IR-cut Filter with Auto Switch (ICR)	
Digital Noise Reduction	2D/3D DNR	
S/N	≥56 dB	
IR Range	Up to 50m (164ft) VIR Range	
Defog	Digital Defog Filter	
WDR	120db WDR	
<b>Video</b>		
Video Compression	265+ Vcom, H.265, H.264, MJPEG	
H.264 Code Profile	Baseline Profile, Main Profile, High Profile	
Frame Rate	Main Stream: 4MP (2688 x 1520), Max 25fps; 4MP (2560 x 1440), Max 25fps; 3MP (2304 x 1296), Max 30fps; 1080P (1920 x 1080), Max 30fps Sub Stream: 720P (1280 x 720), Max 30fps; D1 (720 x 576), Max 30fps 640 x 360, Max 30fps; 2CIF(704 x 288), Max 30fps; CIF(352 x 288), Max 30fps	
BLD	Supported	
BLC	Supported	
OSD	Up to 4 OSDs	
Privacy Mask	Up to 4 areas	
ROI	Up to 8 areas	
Motion Detection	Up to 4 areas	
<b>Network</b>		
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS	
System Compatibility	Onvif (Profile S, G, T), API	
<b>Interface</b>		
Network	10/100M Base-TX Ethernet	
Built-in Microphone	Supported	
<b>Storage</b>		
Edge Storage	Micro SD, up to 256GB	
Network Storage	ANR, NAS(NFS)	
<b>General</b>		
Power	DC 12V±25%, PoE (IEEE 802.3af)	Power Consumption: Max 6.0 W
Dimensions (W x H x L)	190 x 73 x 71mm (7.5" x 2.9" x 2.8")	
Weight	0.45kg (0.99lb)	
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (Non-condensing)	
Ingress Protection	IP67	

# 4MP FIXED LENS VIR MINI BULLET

2688 X 1520:25FPS, 2.8/4MM LENS, 265+ VCOM/H.264, 120DB WDR, MULTI STREAM

Product Details	
Part Code	NV-FB14R5AC28
Description	4MP Bullet, 2688 x 1520:25fps, 265+ Vcom/H.264, Multi Stream, Fixed Lens 2.8mm, SD Card Slot, 50m VIR, 12V & PoE, BLD, 120db WDR, IP67, Mic
Part Code	NV-FB14R5AC04
Description	4MP Bullet, 2688 x 1520:25fps, 265+ Vcom/H.264, Multi Stream, Fixed Lens 4.0mm, SD Card Slot, 50m VIR, 12V & PoE, BLD, 120db WDR, IP67, Mic

## DIMENSIONS

