


5MP FIXED LENS VIR MINI BULLET

2880 X 1620:25FPS, 2.8/4MM LENS, 265+ VCOM/H.264, 120DB WDR, MULTI STREAM

Basic Series

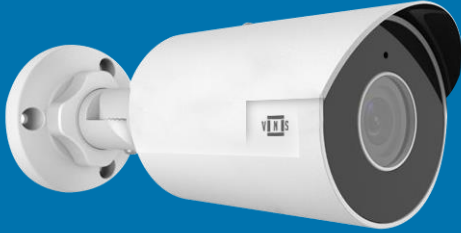

KEY FEATURES

- 5 Megapixel Resolution
- 2880 x 1620:25fps
- 265+ Vcom/H.265/H.264/MJPEG
- Multi Streams
- Fixed Lens 2.8/4mm
- 120db WDR
- Corridor Mode 9:16
- Built-in Microphone
- Micro SD up to 256 GB
- 50m (164 ft) VIR Distance
- DC12V & PoE
- Weatherproof IP67

Model No.	NV-FB15R5AC28	NV-FB15R5AC04
Sensor	5.0 Megapixel, Progressive Scan, CMOS	
Lens	2.8 @ F1.6 Fix Lens	4mm @ F1.6 Fix Lens
Shutter	Auto/Manual, 1 ~ 1/100000s	
Minimum Illumination	Color: 0.003Lux (F1.6, AGC ON) 0Lux with IR on	
Day/Night	IR-cut Filter with Auto Switch (ICR)	
Digital Noise Reduction	2D/3D DNR	
S/N	≥52 dB	
IR Range	Up to 50m (164ft) IR Range	
WDR	120db WDR	
Video		
Video Compression	265+ Vcom, H.265, H.264, MJPEG	
H.264 Code Profile	Baseline Profile, Main Profile, High Profile	
Frame Rate	Main Stream: 5MP (2880 x 1620), Max 25fps; 4MP (2560 x 1440), Max 25fps; 3MP (2304 x 1296), Max 30fps; 1080P (1920 x 1080), Max 30fps Sub Stream: 720P (1280 x 720), Max 30fps; D1 (720 x 576), Max 30fps; 640 x 360, Max 30fps; 2CIF(704 x 288), Max 30fps; CIF(352 x 288), Max 30fps	
BLD	Supported	
BLC	Supported	
OSD	Up to 4 OSDs	
Privacy Mask	Up to 4 areas	
ROI	Up to 8 areas	
Motion Detection	Up to 4 areas	
Network		
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS	
System Compatibility	Onvif (Profile S, G, T), API	
Interface		
Network	10/100M Base-TX Ethernet	
Built-in Microphone	Supported	
Storage		
Edge Storage	Micro SD, up to 256GB	
Network Storage	ANR, NAS(NFS)	
General		
Power	DC 12V±25%, PoE (IEEE 802.3af)	Power Consumption: Max 6.0 W
Dimensions (W x H x L)	190 x 73 x 71mm (7.5" x 2.9" x 2.8")	
Weight	0.45kg (0.99lb)	
Working Environment	-30°C ~ 60°C (-22°F ~ 140°F), Humidity: ≤95% RH (Non-condensing)	
Ingress Protection	IP67	

5MP FIXED LENS VIR MINI BULLET

2880 X 1620:25FPS, 2.8/4MM LENS, 265+ VCOM/H.264, 120DB WDR, MULTI STREAM

Product Details	
Part Code	NV-FB15R5AC28
Description	5MP Bullet, 2880 x 1620 25fps, 265+ Vcom/H.264, Multi Stream, Fixed Lens 2.8mm, SD Card Slot, 50M VIR, 12V & PoE, BLD, 120db WDR, IP67, Mic
Part Code	NV-FB15R5AC04
Description	5MP Bullet, 2880 x 1620 25fps, 265+ Vcom/H.264, Multi Stream, Fixed Lens 4.0mm, SD Card Slot, 50M VIR, 12V & PoE, BLD, 120db WDR, IP67, Mic

DIMENSIONS

