

# 2MP FIXED LENS VIR MINI DOME

1920 X 1280:30FPS, 2.8/4MM LENS, 265+ VCOM/H.265, TRUE WDR, TRIPLE STREAM

META Series



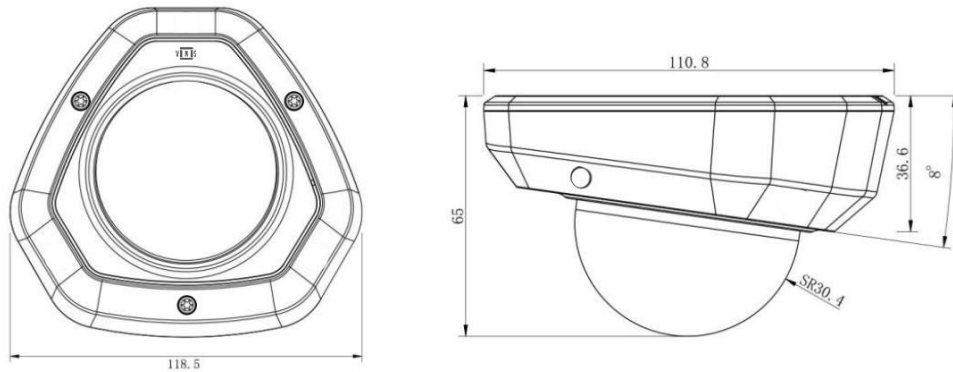
## KEY FEATURES

- 2 Megapixel Resolution
- 1920 x 1080:30fps
- Fixed Lens 2.8/4mm
- 265+ Vcom/H.265/H.264/MJPEG
- 120db WDR
- Triple Streams
- Up to 30m (98 ft) VIR
- XLight
- ONVIF S, T, G & Q
- MicroSD Card Slot
- PoE(802.3af)
- Weatherproof IP67
- Vandal Resistant IK10



Model No.	MD2L1R3AC	MD2L3R3AC
Sensor	1/2.8" Progressive Scan CMOS 2.0 Megapixel	
Lens	2.8 @ F1.6	4mm @ F1.6
Field of View	H111°/D128°/V61°	H91°/D106°/V50°
Shutter	Auto/Manual, 1 ~ 1/100000s	
Minimum Illumination	Colour: 0.001Lux (F1.6, AGC ON) 0Lux with IR on	
Day/Night	IR-cut Filter with Auto Switch (ICR)	
Digital Noise Reduction	2D/3D DNR	
S/N	≥55 dB	
IR Range	Up to 30m (98ft) VIR Range	
Defog	Digital Defog	
WDR	120db	
<b>Video</b>		
Video Compression	265+ Vcom, H.265, H.264, MJPEG	
H.264 Code Profile	Baseline Profile, Main Profile, High Profile	
Frame Rate	Main Stream: 2MP (1920 x 1080, 1280 x 960, 1280 x 720, 704 x 576), Max 30fps Sub Stream: D1 (704 x 576, 640 x 480, 640 x 360, 352 x 288, 320 x 240, 320 x 192, 320 x 180), Max 30fps Third Stream: 2MP (1920 x 1080, 1280 x 720, 704 x 576, 640 x 480, 640 x 360, 320 x 240, 320 x 192, 320 x 180), Max 30fps	
Bit Rate	16Kbps~16Mbps(CBR/VBR)	
9:16 Corridor Mode	Supported	
BLD	Supported (Bright Light Dispersion)	
BLC	Supported	
XLight	Supported	
OSD	Supported	
Privacy Mask	Up to 8 areas	
ROI	Up to 8 areas	
Motion Detection	Supported	
<b>Network</b>		
Protocols	IPv4/IPv6, ARP, TCP, UDP, RTCP, RTP, RTSP, RTMP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL	
System Compatibility	ONVIF Profile G & Q & S & T, API	
<b>Interface</b>		
Network	1 RJ45 10M/100M Base-TX Ethernet	
<b>Storage</b>		
Edge Storage	Micro SD, up to 256GB	
Network Storage	ANR	
<b>Smart Function</b>		
Intelligent Detection	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed	

General	
Power	PoE (IEEE 802.3af)
Power Consumption:	Max 5W With IR On
Dimensions (φ x H)	118.5mmX65mm
Weight	500g (1.1 lbs)
Working Environment	-40°C ~ 60°C (-40°F ~ 140°F), Humidity: ≤95% RH (Non-condensing)
Ingress Protection	IP67
Vandal Resistance	IK10
Product Details	
Part Code	MD2L1R3AC
Description	META Series, Dome, 2MP(1920 x 1080:25/30fps) Fixed 2.8mm Lens, VIR Range up to 30m Micro SD Card Slot, 120db WDR, DC12V/PoE(802.3af), IP67, IK10, Built-in Mic, Built-in AI Function
Part Code	MD2L3R3AC
Description	META Series, Dome, 2MP(1920 x 1080:25/30fps) Fixed 4.0mm Lens, VIR Range up to 30m Micro SD Card Slot, 120db WDR, DC12V/PoE(802.3af), IP67, IK10, Built-in Mic, Built-in AI Function

## DIMENSIONS



## ACCESSORIES

<p>Pole Mount Bracket Model No.: VN-MPM01</p> 	<p>Corner Mount Bracket Model No.: VN-MCM01</p> 	<p>Wall Mount Bracket Model No.: VN-MWM01</p> 
---------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------