

Pro Series




## KEY FEATURES

- 4 / 8 Channel Input
- Third Party IP Cameras Supported with ONVIF conformance
- HDMI at up to 4K (3840 x 2160), 1 VGA
- Up to 8 Megapixels Resolution Recording
- Support H.265+ Vcom/H.265/H.264 Video Formats
- Gigabit Network Interface
- 1 SATA HDDs, up to 12TB for each HDD
- USB 2.0 Front Panel
- Alarm I/O
- Audio I/O
- De-warping Support for Fisheye Cameras
- 4/8 PoE Ports
- DC48V, 1.25A

Model No.	PN0401KP04	PN0801KP08
IP Video Input	4 Channel	8 Channel
Two-Way Audio Input	1 Channel, RCA	
<b>Video</b>		
Incoming Bandwidth	40Mbps	56Mbps
Outgoing Bandwidth	40Mbps	56Mbps
Remote Users	8 User	
<b>Video/Audio Output</b>		
HDMI	3840 x 2160, 1920 x 1080, 1440 x 900, 1280 x 1024	
VGA	1920 x 1080, 1440 x 900, 1280 x 1024	
Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Audio Output	1 Channel, RCA	
Synchronous Playback	4 Channel	8 Channel
Multi-Screen View	1st Screen: 1/4 2nd Screen: 1/4	1st Screen: 1/4/8/9 2nd Screen: 1/4/8/9
<b>Decoding/Recording</b>		
Decoding Format	265+ Vcom, H.265, H.264	
Live view/ Playback	8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF	
Capability	1x 4K@30, 2x 4MP@30, 8x 1080P@30	
Recording Mode	Manual, Schedule, Event	
Trigger Events	Motion Detection, Video Loss, Alarm In	
<b>Hard Disk</b>		
SATA	1 SATA interfaces	
Capacity	Up to 12TB for each HDD	
<b>Network</b>		
Network Interface	1 x RJ-45 10M/100M/1000M self-adaptive Ethernet Interface	
Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, 802.1X, SNMP, 3G/4G, PPPoE	
<b>External Interface</b>		
USB Interface	Front Panel: 2 USB 2.0, Rear Panel: 1 USB 3.0	
Alarm In	4 Channel	
Alarm Out	1 Channel	
Audio I/O	1/1	
PoE	4 Ports (IEEE 802.3af), 32W	8 Ports (IEEE 802.3af), 48W

General	
Power Supply	DC48V / 1.25A
Power Consumption	< 15 W (without HDD)
Working Environment	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Humidity	10% ~ 90% RH (Non-condensing)
Dimensions (W x D x H)	255 x 237 x 47.5 mm (10.04 x 9.33 x 1.87 inch)
Weight (without HDD)	1 kg (2.2 lb) without HDD
Product Details	
Part Code	PN0401KP04
Description	Professional Series, 4 Channel, 1 SATA Interface(12TB Max Support), 40Mbps Input, 40Mbps Output, 1HDMI 4K Output, 1VGA, Audio I/O, Alarm I/O, 1x RJ45, DC48V, 4 PoE Ports
Part Code	PN0801KP08
Description	Professional Series, 8 Channel, 1 SATA Interface(12TB Max Support), 56Mbps Input, 56Mbps Output, 1HDMI 4K Output, 1VGA, Audio I/O, Alarm I/O, 1x RJ45, DC48V 8 PoE Ports

## REAR PANEL

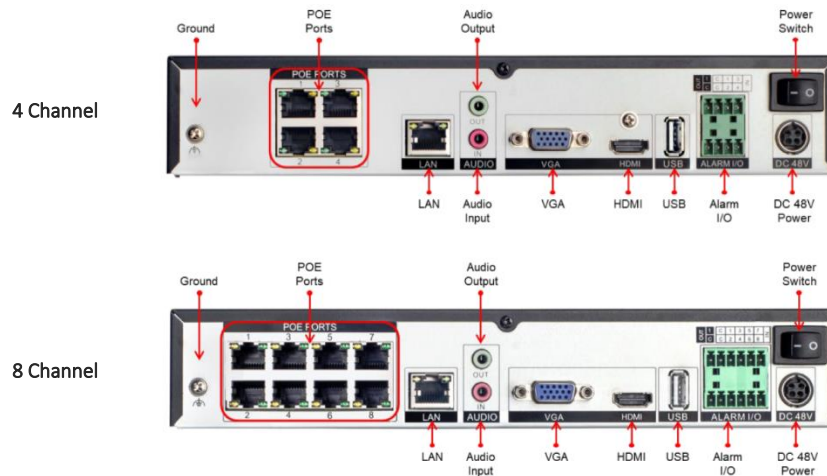

## DIMENSIONS



### Video Network Security

1950 W. Corporate Way PMB 95972, Anaheim, California 92801, United States of America.

Email: [sales@vnsec.us](mailto:sales@vnsec.us) Web: [www.vnsec.us](http://www.vnsec.us)

©2022 Video Network Security Ltd. All rights reserved.

\*Product specifications, shape and availability are subject to change without notice.